


ESP32

TTGO ESP32

ESP32 devkit v1 TTGO mini32 ESP32 bangood amazon

Chip is ESP32D0WDQ6 (revision 1)

Features: WiFi, BT, Dual Core, 240MHz, VRef calibration in efuse

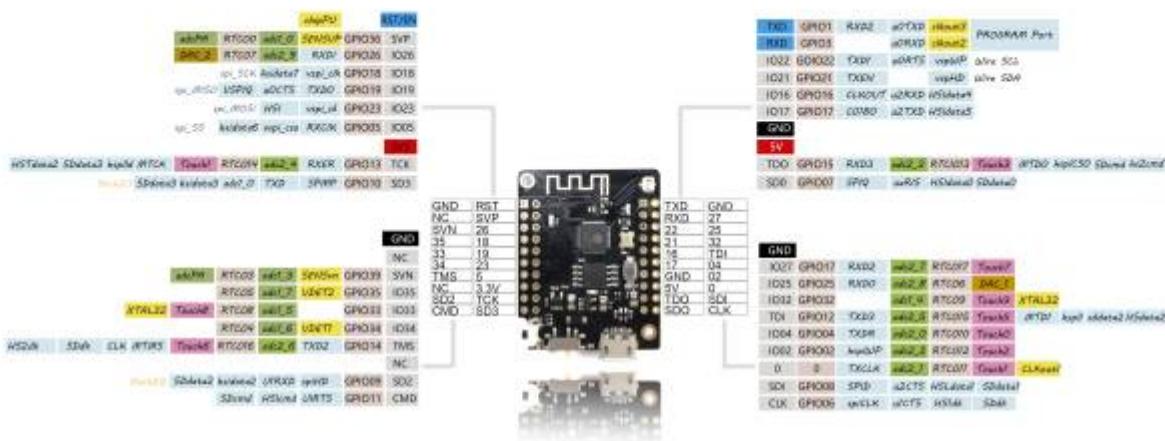

WiFi + Bluetooth Board
4MB Flash MINI 32 v2.0

Power
ESP32 VCC range: 2.2V-3.6V
VBAT: direct to battery (and charger)
VUSB: direct to USB (5V)
VCC: Output of regulator 3.3V/600mA.
Up to 250mA during RF transmissions

Wireless
Wifi: 802.11 b/g/n/e/i
WPA/WPA2/WPA2-Enterprise/SPS
Bluetooth: Bluetooth 4.2/BLE

ESP32
Dual-core Xtensa 32-bit LX6
Up to 240MHz
520Kb internal SRAM
4MB external flash
Multiplexed I/Os allow up to
18 ADC channels
3 SPI interfaces
3 UART interfaces
2 I2C interfaces
2 I2S interfaces
16 LED PWM outputs
2 DACs
10 Capacitive Touch inputs

ADC Preamp
GPIO pins 36, 37, 38, and 39 are able to be used as a low noise analog pre-amplifier

Other*
Hall Sensor
Temp sensor (-40C to 125C)
SD/SDIO/MMC Host Controller
CAN Bus


*On datasheet, but may not be supported yet

Name:	ADC
	DAC
GND	SPI
Control	UART
Arduino	Touch
GPIO	Misc

*GPIO: Port Input Only
*ADC: Preamplifier ADC
GND 3.3V tolerant only

DOIT ESP32

DOIT ESP32 DEVKIT V1 PINOUT

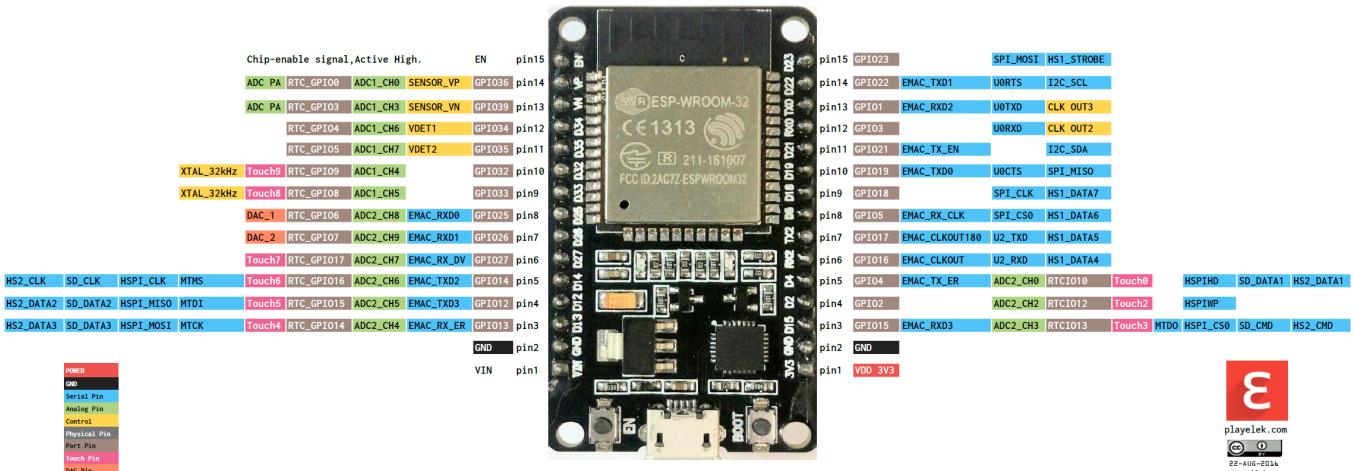

physical pinout

From:
<https://wiki.csgalileo.org/> - Galileo Labs

Permanent link:
<https://wiki.csgalileo.org/projects/internetofthings/esp32?rev=1541228562>

Last update: 2018/11/03 08:02

