

ESP32

AZ-Delivery D1 Mini ESP32

pinout

datasheet


TTGO ESP32

builtin led pin 22

ESP32 devkit v1 [TTGO mini32](#) [ESP32 bangood](#) [amazon](#)

Chip is ESP32D0WDQ6 (revision 1)
Features: WiFi, BT, Dual Core, 240MHz, VRef calibration in efuse

- PIN 22 is connected to green LED

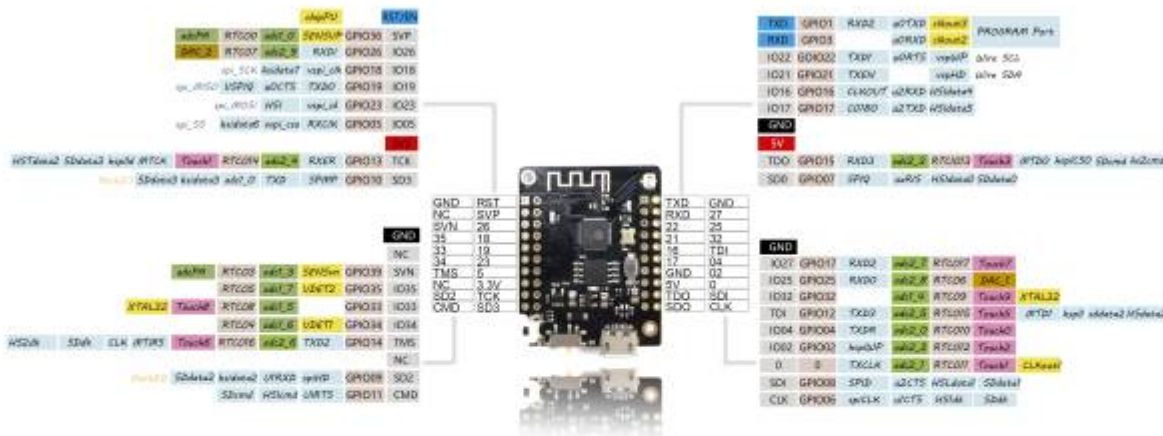

WiFi + Bluetooth Board
4MB Flash MINI 32 v2.0

Power
ESP32 VCC range: 2.2V-3.6V
VBAT: direct to battery (and charger)
VUSB: direct to USB (5V)
VCC: Output of regulator 3.3V/600mA
Up to 250mA during RF transmissions

Wireless
Wifi: 802.11 b/g/n/e/j
WPA/WPA2/WPA2-Enterprise/SPS
Bluetooth: Bluetooth 4.2/BLE

ESP32
Dual-core Xtensa 32-bit LX6
Up to 240MHz
520KB internal SRAM
4MB external flash

Multiplexed I/Os allow up to
18 ADC channels
3 SPI interfaces
3 UART interfaces
2 I2C interfaces
2 I2S interfaces
16 LED PWM outputs
2 DACs
10 Capacitive Touch inputs

ADC Preamp
GPIO pins 36, 37, 38, and 39 are able to be used as a low noise analog pre-amplifier

Other*
Hall Sensor
Temp sensor (-40C to 125C)
SD/SDIO/MMC Host Controller
CAN Bus

*On datasheet, but may not be supported yet

Name


- ADC
- DIAC
- GPII
- SPI
- Control
- UART
- Arduino
- Touch
- GPIO
- Misc

*GPIO: Port Input Only
*ADC: Pre-amplifier ADC
GPIO 3.3V tolerant only

- [arduino example](#)

DOIT ESP32

DOIT ESP32 DEVKIT V1 PINOUT

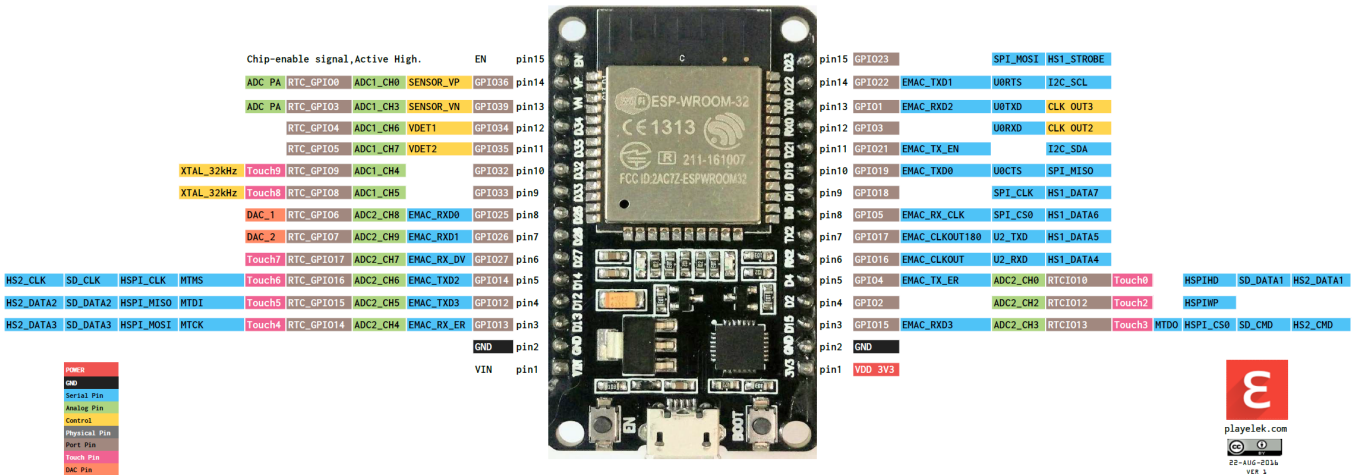


physical pinout

MakerHawk ESP32 OLED Display

- [resources](#)
- [github lib](#)
- [pins arduino](#)

Pins with this arrow are used by on-board OLED, they must not be used for other purpose unless you know what you are doing!

NEW WIFI Kit 32 Pinout Diagram

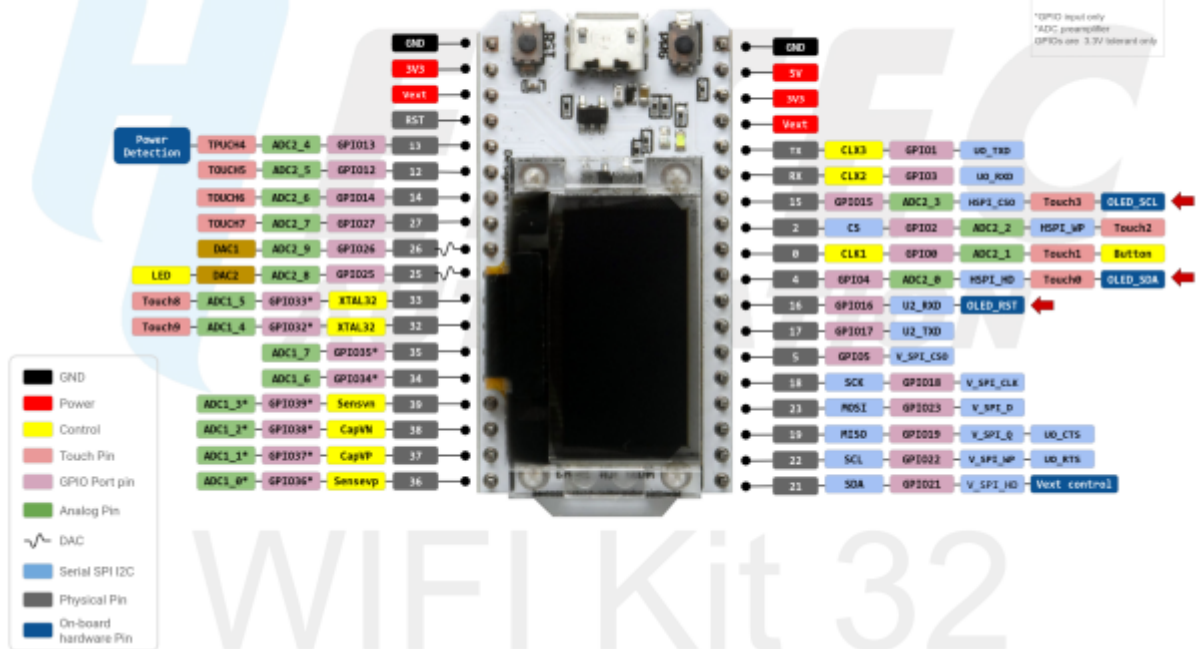

From:

<https://wiki.csgalileo.org/> - **Galileo Labs**

Permanent link:

<https://wiki.csgalileo.org/projects/internetofthings/esp32?rev=1617947687>

Last update: **2021/04/09 07:54**

