

ESP32

AZ-Delivery D1 Mini ESP32

pinout

datasheet


TTGO ESP32

builtin led pin 22

ESP32 devkit v1 [TTGO mini32 ESP32](#) [bangood](#) [amazon](#)

Chip is ESP32D0WDQ6 (revision 1)
Features: WiFi, BT, Dual Core, 240MHz, VRef calibration in efuse

- PIN 22 is connected to green LED

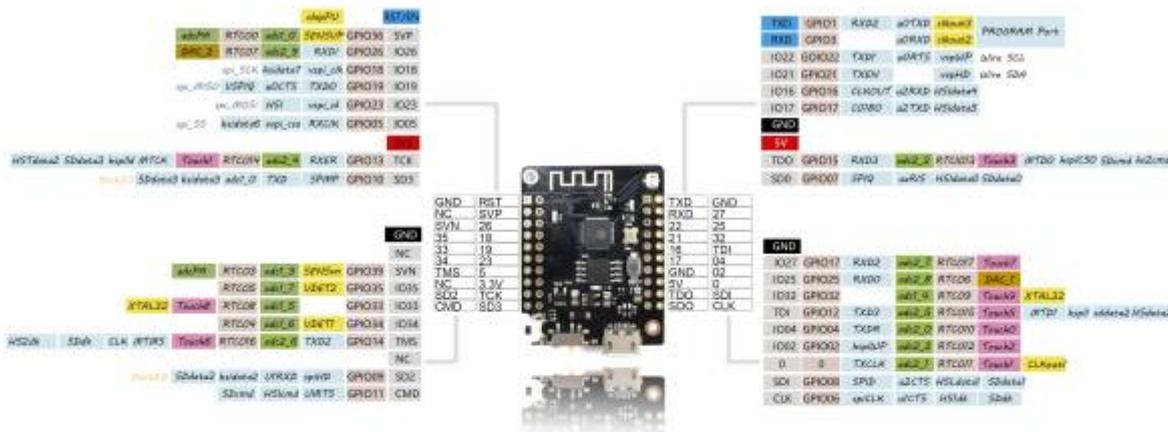

WiFi + Bluetooth Board
4MB Flash MINI 32 v2.0

Power
ESP32 VCC range: 2.2V-3.6V
VBAT: direct to battery (and charger)
VUSB: direct to USB (5V)
VCC: Output of regulator 3.3V/600mA
Up to 250mA during RF transmissions

Wireless
Wifi: 802.11 b/g/n/e/j
WPA/WPA2/WPA2-Enterprise/SPS
Bluetooth: Bluetooth 4.2/BLE

ESP32
Dual-core Xtensa 32-bit LX6
Up to 240MHz
520KB internal SRAM
4MB external flash

Multiplexed I/Os allow up to
18 ADC channels
3 SPI interfaces
3 UART interfaces
2 I2C interfaces
2 I2S interfaces
16 LED PWM outputs
2 DACs
10 Capacitive Touch inputs

ADC Preamp
GPIO pins 36, 37, 38, and 39 are able to be used as a low noise analog pre-amplifier

Other*
Hall Sensor
Temp sensor (-40C to 125C)
SD/SDIO/MMC Host Controller
CAN Bus

*On datasheet, but may not be supported yet

Name

- ADC
- DIAC
- SPI
- UART
- Touch
- Misc

*GPIO: Port Input Only
*ADC: Pre-amplifier ADC
GPIO 3.3V tolerant only

- [arduino example](#)

